

PI-2-BUS




+HEATSINK/FAN-


ESATA




USB3.0/USB3.0



USB2.0 /USB2.0




BT




RESET

WIFI




POWER

前置 Reserve



EMMC



IR Receiver

Headphone



复位, 开机连接座

ON/OFF_KEY



VBAT+




B-



PECOVER



HDMI





ES103TC1



MIPI CAM



RJ45_HR911130C

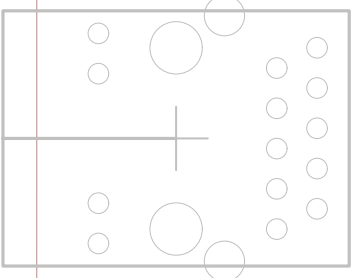

DCIN

EDP



DC LED



TP



DSI



PCIE-X4

