

Removing eMMC from the 14" Pinebook

Description

This is a guide to remove the eMMC from the body of the 14" Pinebook.


STEP 01 Turn your 14" Pinebook over so the bottom is facing up then remove the ten screws.




STEP 02 Remove the back cover of your 14" Pinebook with a flat-head screw driver.



STEP 03 The eMMC is placed under the stencil covered by the tape. To remove the eMMC, you must first gently detach the eMMC stencil by removing the tape from the mainboard.

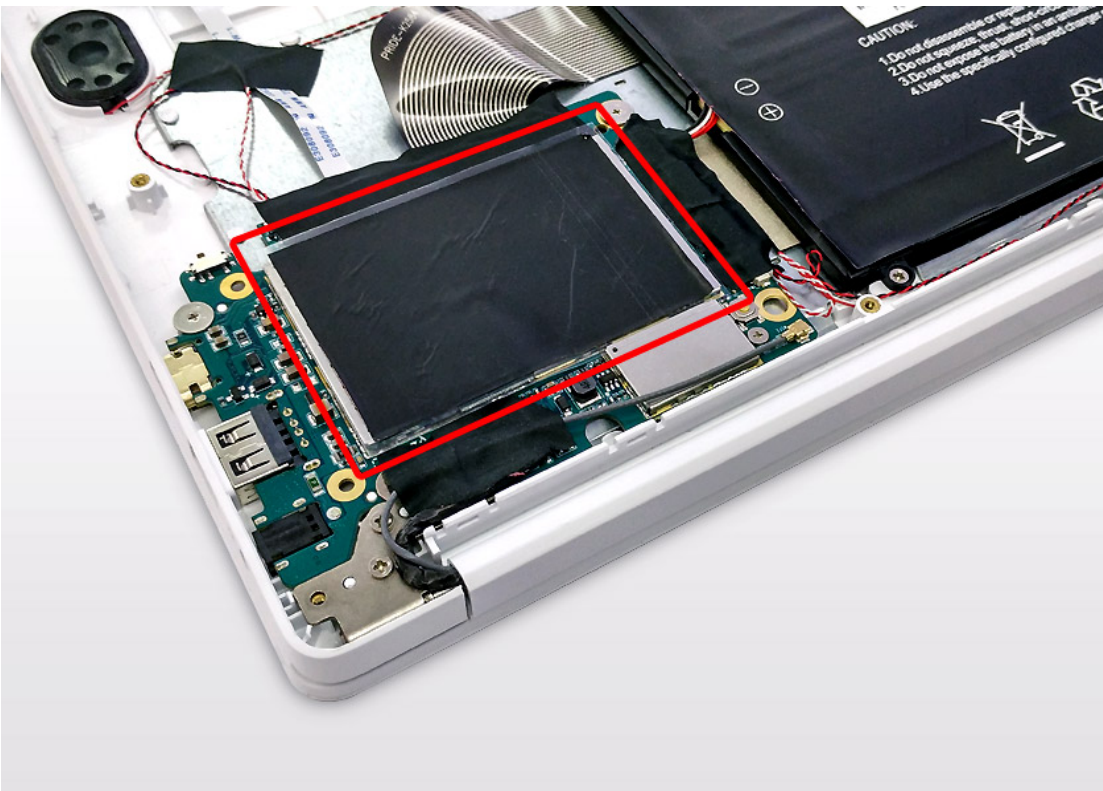

STEP 04 Remove the eMMC by take out the eMMC chip from the mainboards.

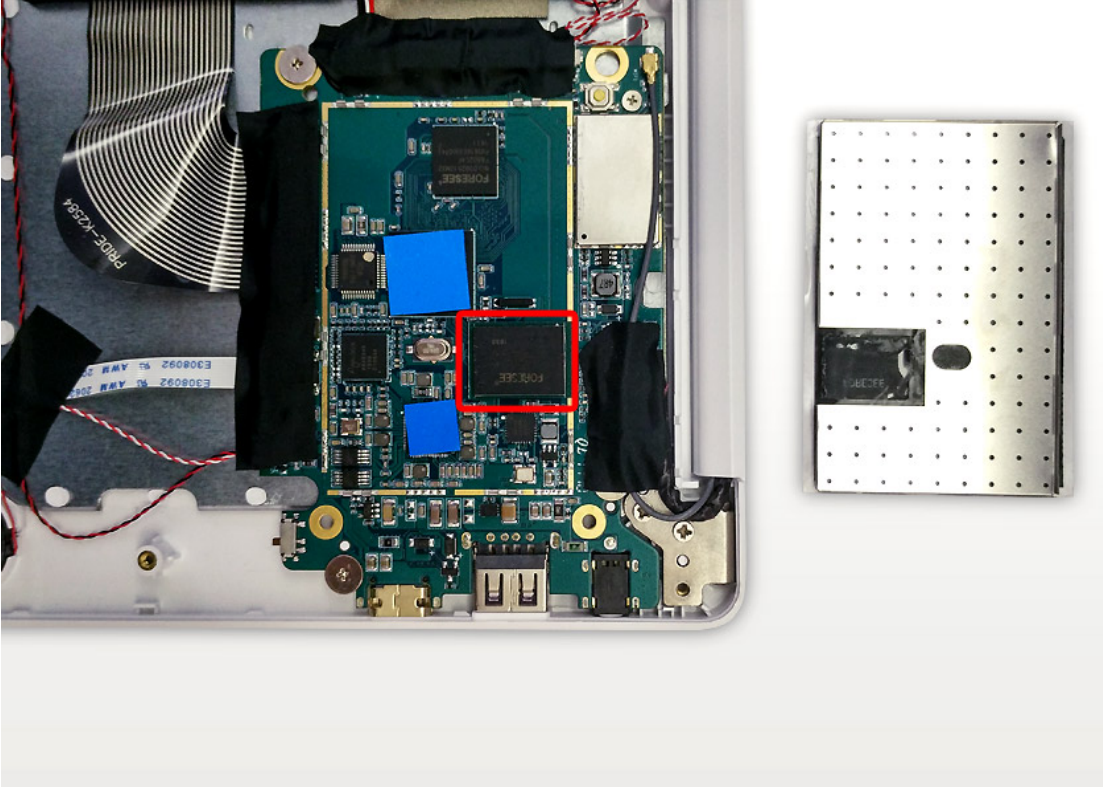

Congratulations! Your eMMC chips has been removed from your 14" Pinebook!

